

SINCE 1996



DG-16 Diamond Grinder

DESCRIPTION

The DG-16 walk behind diamond grinder is unlike any other diamond grinder on the market today. What sets this floor grinder apart from all the others is the floating grinding head and the specially designed shroud that keeps the machine virtually dust free when connected to the A-101 Pulse Vac along with removing all material off the floor reducing clean up cost.

We started with a diamond and worked our way up. After several scraped designs and years of research and development, we are extremely happy with the end product. This is not a converted terrazzo grinder or wood sander, this machine was designed for coating removal to high gloss polishing on totally dry concrete.

With the one piece 16" rubber mounted grinding head (no planetary gears) that is adjusted up and down by spring pressure, you have infinite adjustability. The diamond segments can easily be changed from course diamonds for coating removal to fine resin pads for polishing.

The response we have been receiving from our customers with the DG-16 is "Total amazement". The production is two to three times faster and has a more consistent profile than any other diamond grinder they have used.



Completely Dry Polishing!

APPLICATIONS

- Repairing uneven concrete
- Garage floors
- Basements
- Under shelving
- Industrial floors
- Coating removal
- Trim work
- Polishing



Great for coating removal!

Excellent for grinding uneven seams!



B W MANUFACTURING, INC.

3706 Mill Creek Dr. NE * Comstock Park, MI 49321

Voice: 616-447-9076 * Fax: 616-447-9078

E-mail: info@bwmanufacturing.com

Web-site: www.bwmanufacturing.com





The SB-6 portable, light weight shot blast machine features an easy to adjust handle allowing you to push or pull the SB-6. This feature allows you the ability to blast in any corner and under shelving and machinery.

The horizontally fed blast wheel design leaves a tapered blast edge pattern which eliminates any striping effect.

With the liners and housing on the SB-6 incorporated into one part, it gives you the ability to replace any and all wear components.

By interchanging the rear liner, the SB-6 can blast 4 and 5 inch line stripes in just minutes.

When connected to the A-101 Pulse Vac you achieve a virtually dust free shot blast system.

The SB-6 is the unit for all your small shot blast jobs.

SB-6 Shotblaster

Your solution for light weight, cost effective shot blasting.



APPLICATIONS

Garage floors

Basements

Under shelving

Line stripes

Trim work

Offices



Fully adjustable handle for hard to reach places.

Attached to the A-101 Pulse Vac with 1.5" hose



B W MANUFACTURING, INC.

3706 Mill Creek Drive NE * Comstock Park, MI 49321

Voice: 616-447-9076 * Fax: 616-447-9078

E-mail: info@bwmanufacturing.com

Web-site: www.bwmanufacturing.com





Grinder control at your fingertips

Hand grips for maximum control

Powerful 150-watt halogen light

Heavy-duty on/off switch

Two inch vacuum inlet for dust free operation

Gas filled shocks to ensure total control and level grinding

Forged from 16 gauge steel tubing, the HUM-B™ edge grinder is lightweight, tough and easy to control

Equipped with a 12-segment diamond cup wheel and the Dust Grabber™ dust shroud

Powerful 6,000-rpm seven inch angle grinder

Five inch swivel caster wheels roll effortlessly across work surfaces



The HUM-B edge grinder is the only surface grinder equipped with our patented **Dust Grabber** dust shroud. Made of steel and fitted with a replaceable polymer seal. The **Dust Grabber** dust shroud creates a vortex of moving air under and around the circumference of the shroud allowing the grinder to float effortlessly across the floor. Standard shrouds attempt to seal the tool to the surface creating suction lock in the process. When the seal is broken, dust is allowed to escape. This is not so with the **Dust Grabber** dust shroud, it allows air to continually flow through the seal continuously which prevents suction lock. Another great feature of the **Dust Grabber** dust shroud is maintaining control of the dust even while grinding over uneven surfaces. If dust escapes from the **Dust Grabber** dust shroud, it will be vacuumed back in through the corrugated seal.

CDCLarueTM
INDUSTRIES, INC.

For More Information, Call
1.866.954.9700

9384 Ridgeview Street
Tulsa, OK 74131
P: 918-216-6100
F: 918-216-6199
info@cdclarue.com


www.cdclarue.com

PB-2300

Pulse-Bac® 2300 can take on the dirtiest environments without clogging filters. Equipped with our patented Pulse-Bac filtration system, the PB-2300 is ideal for vacuuming up fine powders like powder coat, concrete, and drywall or capturing dust generated from surface preparation equipment, and manufacturing machinery. The PB-2300 is a versatile vacuum that delivers Non-Stop Vacuum Power.



- Durable high strength P.T.F.E. coated Spun Bond Polyester filters capture dust particles as small as .1 micron in size and last up to 10X longer than conventional filters.
- Operates on a standard 110-volt 20 amp outlet, generating 270 CFM with 80" of lift.
- All metal parts are powder coated or galvanized.
- 20 gallon collection tank comes with a 5 caster dolly able to hold up to 300 lbs. Optional extender allows for vacuum head to be placed on top of a 55 or 40 gallon drum.
- Lightweight and compact size gives the PB-2300 superior versatility, making it easily maneuverable for any size worker on any jobsite.

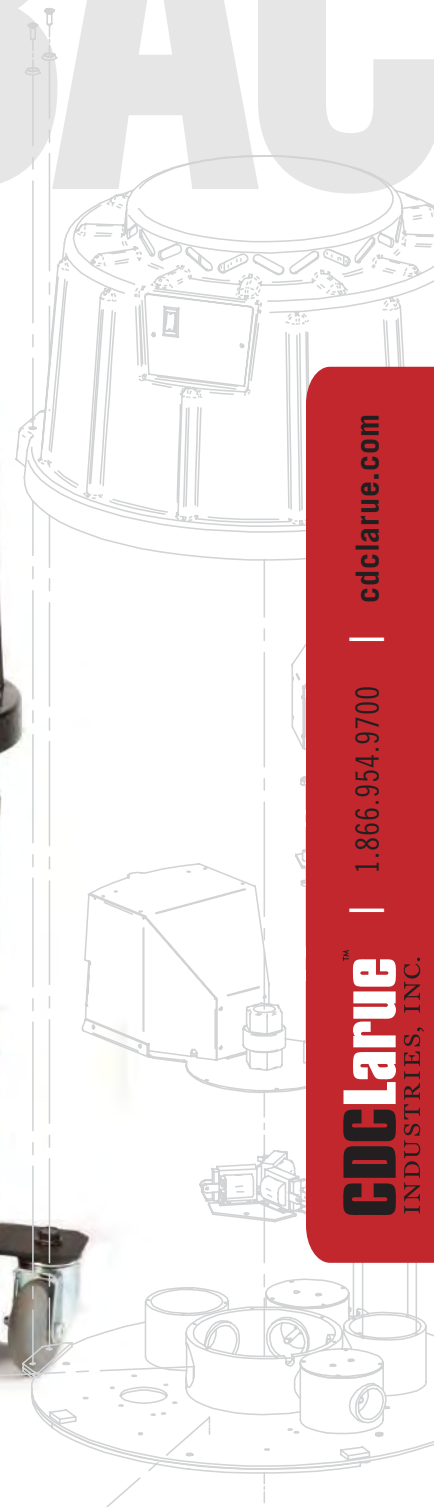

TECHNICAL SPECIFICATIONS

| | | | |
|--------------------------|---|--------------------------|--|
| Model | Pulse-Bac 2300 (PB-2300) | Voltage | 120 V AC, 50/60 Hz |
| Filtration System | Pulse-Bac Self-Cleaning | Current | 15 Amps |
| Filters | 3 x Twist-On/Off Filters, 100% Spun Bond Polyester PTFE coated media. | Dimensions | 21.57" W x 37.47" H x 21.32" L |
| Motor | 2 x AMETEK LAMB MOTORS, 1100 Watts (P/N 103575-03) | Weight | 87 lbs. |
| Performance | 270 CFM, 80" lift | Dust Storage Tank | 20 gal. Tank w/5 caster dolly |
| Vacuum Port Inlet | 2 Inch female inlet | Casters | Non-marking, and conductive. 3" swivel with wheel locks. |
| Decibel Level | 70 dB | | |

cdclarue.com

1.866.954.9700

CDCLARUE
INDUSTRIES, INC.



Hand Held Diamond Grinders

DG-4.5 Diamond Grinder

Applications and Features

- Grinding
- Coating removal
- Trim work
- Vertical walls
- Durable steel shroud
- Removable side for edge work



DG-70 Diamond Grinder

Applications and Features

- Coating removal
- Concrete preparation
- Controlled environment grinding
- Garage and basement floor preparation
- Durable steel shroud construction
- 3/8" wall clearance
- Nylon brush seal



All hand grinders attach to the A-101 Pulse Vac with a 1.5" hose.



Removable guard exposes cup edge. (only on 4.5" models)

B W MANUFACTURING, INC.

3706 Mill Creek Drive NE * Comstock Park, MI 49321

Voice: 616-447-9076 * Fax: 616-447-9078

E-mail: info@bwmanufacturing.com

Web-site: www.bwmanufacturing.com





Centurion 17,500 Watt Electric Start Portable Generator

Features

26,250 Surge Watts

- Powerful enough to start a five ton A/C unit
- Will also start two 4-ton A/C units



Electric Start

- Starts with a simple press of a button

Automatic Idle Control

- Reduces noise, increase fuel efficiency and extends life

Full Pressure Lubrication

- Eliminates wear during startup and extends life

16-Gallon Gas Tank

- Generates up to 10 hours of electricity at half load

Portability Kit

- Includes 13" all terrain tires and heavy-duty lifting eye



Specs

| | |
|-------------------------|---------------------------|
| MODEL NUMBER | 5396 |
| VOLTAGE | 120/240 |
| FREQUENCY | 60 Hertz |
| ENGINE | 33-HP Generac V-Twin OHVI |
| ELECTRIC START | Yes (Battery Included) |
| IDLE CONTROL | Yes |
| AUTO VOLTAGE REGULATION | Yes |
| LOW OIL ALERT | Yes |
| FUEL TANK | 16 Gallons |
| RUN TIME (50% LOAD) | 10 Hours |
| PORTABILITY KIT | Yes |
| LIMITED WARRANTY | 2 Years |
| WEIGHT | 430 Lbs. |
| DIMENSIONS | 38.5"H x 30.75"W x 48.5"L |
| DECIBEL RATING | 77 dB(A) @ 7 Meters |